



OPEN SPACE & TRAILS DEPARTMENT

970.668.4060 ph | 970.668.4225 f
www.SummitCountyCO.gov

0037 Peak One Dr. | PO Box 5660
Frisco, CO 80443

REQUEST FOR PROPOSALS **for** **Mesa Cortina Slash Pile Reconstruction** **May 22, 2023**

Proposals Due:

June 9, 2023 by 5:00 PM MST

Overview

Summit County Government (“County”) is soliciting bids from qualified contractors to provide hand cutting, and reconstruction of and addition of blow-down to existing slash piles, as further described in the Scope of Work (Attachment 1), at the Mesa Cortina Open Space near Silverthorne, CO (Map 1).

A *mandatory* site visit is schedule for **9:00am on Tuesday, May 30** (Attachment 2).

Copies of the request are available at www.SummitCountyCO.gov under ‘Bids & Proposals’ or by request at the County Open Space and Trails Office. Contact Jordan Mead, Resource Specialist for additional project information at Jordan.mead@summitcountyco.gov or (970) 668-4065.

Scope of Services

Contractor shall furnish all labor, transportation, and incidentals necessary to perform the hand cutting, slash piling, and pile reconstruction services as described above and detailed in Attachment 1.

Work shall be completed as set forth in a contract for this project to be negotiated with the County and based upon the contractor’s written proposal.

Date and time of service

Service will be performed on an ongoing daily basis upon execution of a Services Agreement between the County and the selected contractor. Service will be performed on a regular daily schedule, Monday through Friday, 7am-5pm, to be agreed upon prior to contract. All work under this contract must be completed no later than October 1, 2023.

Indemnification and Insurance

Contractor shall indemnify and hold harmless the County from and against all claims, damages, losses, and expenses arising out of or resulting from acts or omissions of the Contractor, Contractor’s sub-contractors or otherwise arising out of the performance of services by Contractor. No later than seven (7) days following the execution of an Independent Contractor Agreement between the County and Contractor, the Contractor shall provide the County with certificates of insurance evidencing the types and amounts of insurance specified below:

- a. Worker’s Compensation and Employer’s Liability:
 - i. Worker’s Compensation must be maintained with the statutory limits.
 - ii. Employer’s liability is required for minimum limits of:
 - \$1,000,000 Each Accident
 - \$500,000 Disease Policy
 - \$1,000,000 Disease Each Employee
- b. Commercial General Liability:
 - i. \$1,000,000 Each Occurrence
 - ii. \$2,000,000 General Aggregate

- iii. \$2,000,000 Products Completed Operations Aggregate
- c. Automobile Liability: Contractor will maintain business auto liability coverage covering liability arising out of any auto (including owned, hired and non-owned autos) used in the performance of services under this Agreement.
 - i. \$1,000,000 Combined Single Limit Each Accident

Insurance coverage shall not be reduced below the limits described above or cancelled without the County's written approval of such reduction or cancellation. Certificates of such insurance, of agents and subcontractors, shall be provided to the County upon request. With regard to all insurance, such insurance shall:

- Be primary insurance to the full limits of liability herein before stated and, should County have other valid insurance, County insurance shall be excess insurance only; and
- Not cancelled without thirty (30) days prior written notice to the County.

Proposal Format

Costs for performing services outlined in this request for proposals shall be clearly stated to allow the County to effectively evaluate each proposal. A bid table (Attachment 3) is included for your convenience. A potential schedule of services should also be included in the proposal.

Refinements and Improvements

Applicants should feel free during the proposal submission process to provide any suggestions or comments that might be advantageous for the County to consider in terms of any efficiencies, issues or processes. The County is not committed to any single scenario, but efficiency of resources and minimizing impacts are critical in completing this work.

The following pages contain the RFP instructions and owners requirements.

Part I - ADMINISTRATIVE INFORMATION

A. Issuing Officer

This Request for Proposals ("RFP") is issued by Summit County Open Space and Trails. For questions, please contact Jordan Mead, Resource Specialist, at jordan.mead@summitcountyco.gov or (970) 668-4065.

B. Purpose

This RFP provides prospective contractors with sufficient information to prepare and submit proposals for consideration by the County. To be considered responsive, each proposal must provide for completion of the tasks outlined in the RFP.

C. Scope

This RFP contains the instructions governing the proposals to be submitted and the materials to be included therein. These are mandatory requirements that must be met to be eligible for consideration.

D. Scheduling

Proposals must be submitted via email to jordan.mead@summitcountyco.gov to the Summit County Open Space and Trails by **June 9, 2023** no later than **5:00PM MST**. The proposal should outline the schedule for commencement of service.

E. Inquiries and Questions

Prospective applicants are welcome to make inquiries and ask questions concerning the RFP to obtain clarification of the any requirements or schedule a site visit to the properties. Direct all inquiries to:

Jordan Mead, Resource Specialist
Summit County Open Space and Trails
(970) 668-4065
jordan.mead@summitcountyco.gov

Time Schedule:

Monday, May 22, 2023 - Request for Proposals publicly advertised and posted on County website

Tuesday, May 30, 2023, 9AM - **Mandatory** Site Visit with County Staff

Friday, June 2, 2023 - Deadline for all Questions

Monday, June 5, 2023 - All Questions, Comments and Responses to Questions posted by the County at Bids and Proposals on www.SummitCountyCO.gov

Friday, June 9, 2023 - **Proposals must be submitted via email to jordan.mead@summitcountyco.gov no later than 5:00 p.m. MST**

Monday, June 12, 2023 - Official Bid Opening at 9:00 a.m.

Monday, June 12, 2023 - Contract negotiations (week of)

Monday, June 19, 2023 - Notice of Award and send Unsuccessful Bidder letter (email) to all proposers

F. Instructions for Submission of Proposals

It is imperative, when submitting a proposal, that the outside of the submission email be addressed as follows and with appropriate text in the email subject line and text in the top few lines of the body of the email:

Email Address:

Jordan.mead@summitcountyco.gov

Subject Line Text:

<Vendor's Name> - Proposal for: Mesa Cortina Slash Pile Reconstruction

Body Text:

ATTN: Jordan Mead, Resource Specialist
Summit County Open Space and Trails
Proposal for: Mesa Cortina Slash Pile Reconstruction

1. Contractor's company name
2. Contact name and phone number

G. Late Proposals

It is the responsibility of each vendor submitting a proposal to ensure that emailed proposals arrive to the Summit County Open Space and Trails Department by 5:00 PM MST on June 9, 2023.

H. Proprietary Information

Any restrictions on the use of data contained within a proposal must be clearly stated in the proposal itself.

I. Response Material Ownership

All materials submitted regarding this RFP become the property of the County and will only be returned at the County's option.

J. Incurring Costs

The County is not liable for any costs incurred by those who have submitted proposals prior to issuance of a signed contract.

K. Acceptance of Proposal Content

The contents from the selected contractor's proposal will become contractual obligations if a subsequent agreement is reached. Failure of the successful contractor to accept these obligations may result in cancellation of the award and such contractor may be removed from future solicitations.

L. Acceptance Time

The County intends to make a proposal selection within 20 business days after the closing date for receipt of proposals.

M. Budget

Costs for performing services must be included in the proposals and should be clearly stated to allow the County to effectively evaluate each proposal.

PART II – PROPOSAL CONTENT

The proposal submitted must clearly address the requirements outlined in the RFP. Any concerns that the contractor may have about meeting these requirements shall be specifically identified in the proposal.

Scope of Work

Provide an outline of the contractor's understanding of the project. Summarize the basic approach to providing the services, and **any recommendations on improving efficiencies in the process**. The work plan must include dates of when work will start, estimated time to complete the unit, and a spill prevention plan that states all hazardous substances to be used on site and measures to prevent spills and release of hazardous substances.

Qualifications

Contractor shall furnish a summary of experience on similar projects and be prepared to provide examples. Include a brief description of past and current projects. Each summary shall include a brief project description and name, address and phone number of a local contact person involved in the project. The statement of qualifications should also provide a summary of contractor's ability to successfully complete the requirements of this RFP. The statement of qualification shall be brief but shall include at a minimum the following:

1. Description of similar projects
2. Capabilities (including equipment) and staff

Bid Table

Complete the Bid Table worksheet included at Attachment 3 and include with your bid.

PART III – PROPOSAL EVALUATION AND SELECTION

The County intends to engage the most qualified contractor available for this assignment while minimizing the costs to the County. Responsiveness to the RFP will be a principle basis for evaluation. Proposals shall provide a straightforward and concise presentation adequate to satisfy the requirements of the RFP. The proposal should clearly express the contractor's understanding of the County's specific requirements, indicating the contractor's qualifications to conduct this service in a thorough and efficient manner.

Failure to disclose a conflict of interest is a misdemeanor criminal offense under Colorado Law. Such conflict may arise if any public official exercises any substantial discretionary function in connection with a government contract,

purchase, payment or other pecuniary transaction without necessary disclosures as defined by Colorado Revised Statutes (C.R.S.) Section 18-8-308 as amended.

Selection Process.

1. The County reserves the right to reject any and all proposals, to consider alternatives, to waive irregularities and to re-solicit proposals.
2. The County reserves the right to conduct such investigations of, and discussions with, those who have submitted proposals (“Proponents”) or other entities as it deems necessary to assist in the evaluation of any proposal or to secure maximum clarification and completeness of any proposal.
3. All proposals submitted must be valid for a minimum period of ninety (90) days after the date of the proposal opening. Each Proponent must submit with the proposal a list of all subcontractors, independent contractors or sub-consultants employed or proposed to be employed by the Proponent in the performance of the contract.
4. Selection of a contractor will be made at the sole discretion of the County. The County may consider the following criteria when evaluating proposals that includes but is not limited to:
 - a. Cost;
 - b. The reputation, experience and efficiency of the Proponent;
 - c. The ability of the Proponent to perform the contract or provide the goods and services within the time specified;
 - d. The comparative quality of the goods and services bid;
 - e. The Proponent’s performance under previous contracts with Summit County;
 - f. The number and scope of conditions attached to the proposal;
 - g. The Proponent’s interest in the project, as well as their understanding of the project scope and the specific requirements of Summit County; and
 - h. The application of all of the above criteria to any sub-consultants, subcontractors or products to be utilized by the Proponent.
5. Contract negotiations will take place with the most qualified contractor. The County reserves the right to incorporate specific contract provisions into the Proponent’s standard contract if the County’s standard contract cannot be used. Such provisions include but are not limited to insurance and indemnification provisions and governmental immunity provisions. If a contract cannot be negotiated, the negotiations will be terminated in writing and negotiations will begin with the next most qualified contractor.

ATTACHMENT 1. Scope of Work and Project Requirements

Mesa Cortina Pile Reconstruction & Blow Down Clean Up

Purpose

Project objectives:

- Reconstruct and consolidate hand piles to prepare for burning
- Buck, limb and pile recent blow down
- Clear ignition zone around hand piles

Background

The Mesa Cortina Fuels Reduction project began with initial treatments in the summer of 2019. Standing dead, diseased, and down trees were cut using hand methods. Merchantable material was removed and unmerchantable material was piled into approximately 280 slash piles. Many piles are small (4'H x 4'W x 4'L), lack fine fuels required for ignition, were constructed beneath live trees, or some combination of these factors. Additionally, several live and dead trees have blown down in the treatment area following the initial treatment.

To complete slash pile burning and meet the fuels reduction goals of this project, the slash remaining from 2019, as well as the newly blown down trees, must be reconstructed and/or consolidated to allow for safe and efficient prescribed pile burn operations. The area around the slash piles must also be cleared of saplings and large woody material.

Much of the project area is in sensitive riparian habitat and on moderate to steep slopes. To avoid resource damage, all work under this contract must be performed by hand and no machinery is allowed.

General Description of Work

A *mandatory* site inspection is required for this project. The site inspection tour is scheduled for Tuesday, May 30th at 9:00am MDT. **CONTRACTOR** must submit bids no later than 5:00pm MDT June 9th, 2023 MDT. **CONTRACTOR must complete project by October 1st, 2023**.

The project covers approximately 29 acres on Summit County Open Space land (Map 1).

Work consists of reconstruction, consolidation, and/or scattering of previously built hand piles to the specifications outlined in this document. Work will also include bucking, limbing and piling blowdown in the project area.

Unit Description

Location: The Mesa Cortina Open Space project is located southwest of the Town of Silverthorne and just west of Interstate 70 in Summit County, CO. The unit is bordered by Summit County

Open Space to the west, Interstate 70 to the east, and residential developments to the north and south. Royal Buffalo Dr. (CR 1240) forms the unit boundary to the north and Fawn Ct. (CR 1261) and Silverheels Dr. (CR 1274) form a discontinuous unit boundary to the south (Map 1).

Access: From I-70 take Exit 205, Silverthorne/Dillon, and travel north on HWY 9 for 0.1 miles to the intersection with Wildernd Rd. (CR 1255). Turn left on Wildernd Rd. (CR 1255) and continue for 0.2 miles to the intersection with Royal Buffalo Dr. (CR 1240) and continue straight for 0.9 miles. Turn left onto Buffalo Dr. (CR 1265) and follow for 0.1 miles. Turn left on Silverheels Dr. (CR 1274) and utilize roadside parking adjacent to the unit (Map 1).

Description: The entire treatment area is bisected by Ryan Gulch and the associated wetland and riparian habitat (Map 1). The treatment area above and west of Buffalo Dr. contains a mix of Aspen, Engelmann Spruce, and Subalpine Fir in the riparian habitat with lesser amounts of lodgepole pine on the adjacent uplands. This area also contains the highest density of blow down.

Below and to the east of Buffalo Dr., the treatment area is wider and contains a variety of species compositions. Communities range from nearly pure stands of aspen, spruce, and fir on the north facing slopes below Fawn Ct. and Silverheels Dr., mixed conifers in the riparian area, and nearly pure lodgepole pine stands on the south facing slopes adjacent to Royal Buffalo Dr. This area contains more continuous forest cover and less blow down than the area above and west of Buffalo Dr. (Map 1).

Prescriptions

Pile Reconstruction and/or Consolidation

208 piles are marked with blue paint. Piles with blue paint shall be reconstructed and/or consolidated with other marked and unmarked piles to the specifications below:

- Hand pile size is approximately 10W' x 10L' x 7H'.
- Each hand pile shall include, in its center, small sized slash to provide "kindling" for prompt ignition and to aid in combustion of larger slash. Preferred material to place in center of pile is limbs containing needles of coniferous trees. If needed, collect other small woody debris in the vicinity to place in the center of the pile. Cut standing dead and/or live trees, when necessary and according to Exhibit A, to generate adequate fine fuels for ignition and consumption of piles. **CONTRACTOR** will consult with Contract Administrator(s) if necessary when excessive cutting of residual live trees needs to occur to obtain adequate fine fuels.
- Hand pile shape shall be conical or tee-pee shaped, placing small diameter material less than four inches (<4.0") at large end in the center of the pile and placing larger diameter lengths on the outside of pile. Logs in slash piles shall be arranged in a near vertical configuration.
- Hand piles will be placed in openings. Reasonable efforts should be made to place piles 10 feet away from regeneration and standing tree's boles and branches. If not possible, regeneration and live trees shall be cut and piled following the slash and piling specifications to achieve the 10 foot buffer distance. **CONTRACTOR** will consult with Contract Administrator(s) if necessary when excessive cutting of residual live trees needs

to occur to reach buffer distance. If needed, Contract Administrator(s) will require that piles be moved or live trees be cut to achieve buffer distance.

- The ignition zone within 5 feet of ALL piles, painted and unpainted, shall be cleared of course woody debris greater than 10” in diameter.
- Material from marked piles can be consolidated into unmarked piles where appropriate.
- Do not pile in steep and narrow gullies or ditches. Consult with Contract Administrator(s) for any piling problems.
- Do not build hand piles on top of stumps and/or downed logs. Cut downed logs away from existing piles, or move existing piles, when necessary.
- Do not build hand piles within 15 feet of roads and trails. If necessary, cut live trees to achieve 15-foot trail buffer.

Pile Scattering

35 piles are marked with orange paint. Piles with orange paint shall be scattered to the specifications below:

- Disassemble and scatter woody material into the surrounding area. 50% of the material must be scattered at least 15 feet away from the piles outer footprint.
- Scattered slash depth will be no more than 18 inches from ground level.
- Material shall not lean against an uncut tree, stump, log, or any obstacle.
- Leave no slash across any trails and roads.
- Keep slash and debris out of ditches and drainage channels and 15 feet from trails.

Blowdown Treatment

- Limb and then buck ALL pre-existing down trees (75% sound or greater) between 3.0” and 10.0” on small end and hand pile ALL cut tree material less than 10.0 inches in diameter (boles, limbs, tops) to the specifications above. These materials can be added to existing piles or used to assist in pile reconstruction.
- Limb and then buck boles of pre-existing down trees (75% sound or greater) greater than 10.0 inches at the small end to 6-8 foot lengths and leave in place in contact with the ground.

Additions, Restrictions, etc.:

- Retain bearing and marker trees with metal signage and/or red painted slash marks.

Safety/Recreation

- The Contract Administrator(s) may suspend operations temporarily due to special events in or around the project area, including but not limited to Town or County sanctioned mountain bike and adventure races. The Contract Administrator(s) will provide a minimum of 30 days advanced warning to **CONTRACTOR** if an event requiring a temporary suspension is occurring.
- **CONTRACTOR** must provide and locate signs to inform the public of cutting operations in the area prior to commencement of any work. These signs must meet the DOT requirements and be approved by Contract Administrator(s).

- When felling trees within 1.5 tree lengths of a trail or road, a trail guard shall pause foot/recreation traffic until the tree is safely on the ground. Trail closures should not exceed 30 minutes.

Additional Performance Standards

- All operations in all units must take place from 0700 – 1700, Monday through Friday.
- The Contract Administrator(s) may suspend or limit operations if excess damage is occurring due to mud, snow, extreme fire danger, etc. or due to the following situation(s): failure to meet contract specifications.
- At no time shall **CONTRACTOR** block or impede any county road right of ways with equipment or project operations for an extended period. If roads must close for cutting and removing trees, **CONTRACTOR** will limit closures and is responsible for traffic control and safety.
- **CONTRACTOR** must submit a detailed work plan to the Contract Administrator(s) and complete a detailed site walk through with the Contract Administrator(s) before work may commence. The work plan must include dates of when work will start, order of unit completion, estimated time to complete each unit, a traffic control plan, and a spill prevention plan.
- Contract Administrator(s) must approve all hazardous materials stored on site. Identify any hazardous materials in the spill prevention plan.

Fire Liability Requirements

The **CONTRACTOR** will exercise all possible precautions to prevent wildfire and shall assist in the suppression of any fire that is on or threatening the project area. During the fire season, the **CONTRACTOR** will have the following firefighting tools located on the sale site:

- A combination of shovels, McLeod's and Pulaski's sufficient to equip each person on the treatment crew
- A minimum of one back-pack pump per every 5 people on the treatment crew
- A minimum of two 5-pound fire extinguishers available at fueling locations

Inherent Dangers

The following physical hazards are located on or near the property and may not be obvious: Dead trees, mining remnants including holes and structures, barbed wire, vehicle traffic, blind curves, pedestrians, homes and outbuildings, onlookers, overhead power lines, water infrastructure etc.

Subcontracting

CONTRACTOR may not assign this agreement or any interest therein, without prior, written consent of the Contract Administrator(s).

Damage Penalty

The **CONTRACTOR** shall conduct all operations in a timely manner and shall take all necessary precautions to protect the remaining forest stand. **CONTRACTOR** will pay for excessive damage to the remaining forest stand or the removal of undesignated products at the rate of **\$30.00 per tree**. The Contract Administrator(s) will charge for damages incurred to the site at actual repair costs, plus appropriate administrative time.

PRICE, COST AND PAYMENT PROVISIONS

Contract Administrator(s) will make the decision when the project is complete and **CONTRACTOR** may submit an invoice for payment. It will be the responsibility of **CONTRACTOR** to let Contract Administrator(s) know when he/she believes units are complete.


Invoices and Payments shall be sent to:

Jordan Mead, Resource Specialist
Jordan.mead@summitcountyco.gov
PO Box 5660
Frisco, CO 80443


Mesa Cortina Open Space Fuels Reduction

MAP 1

Silverthorne

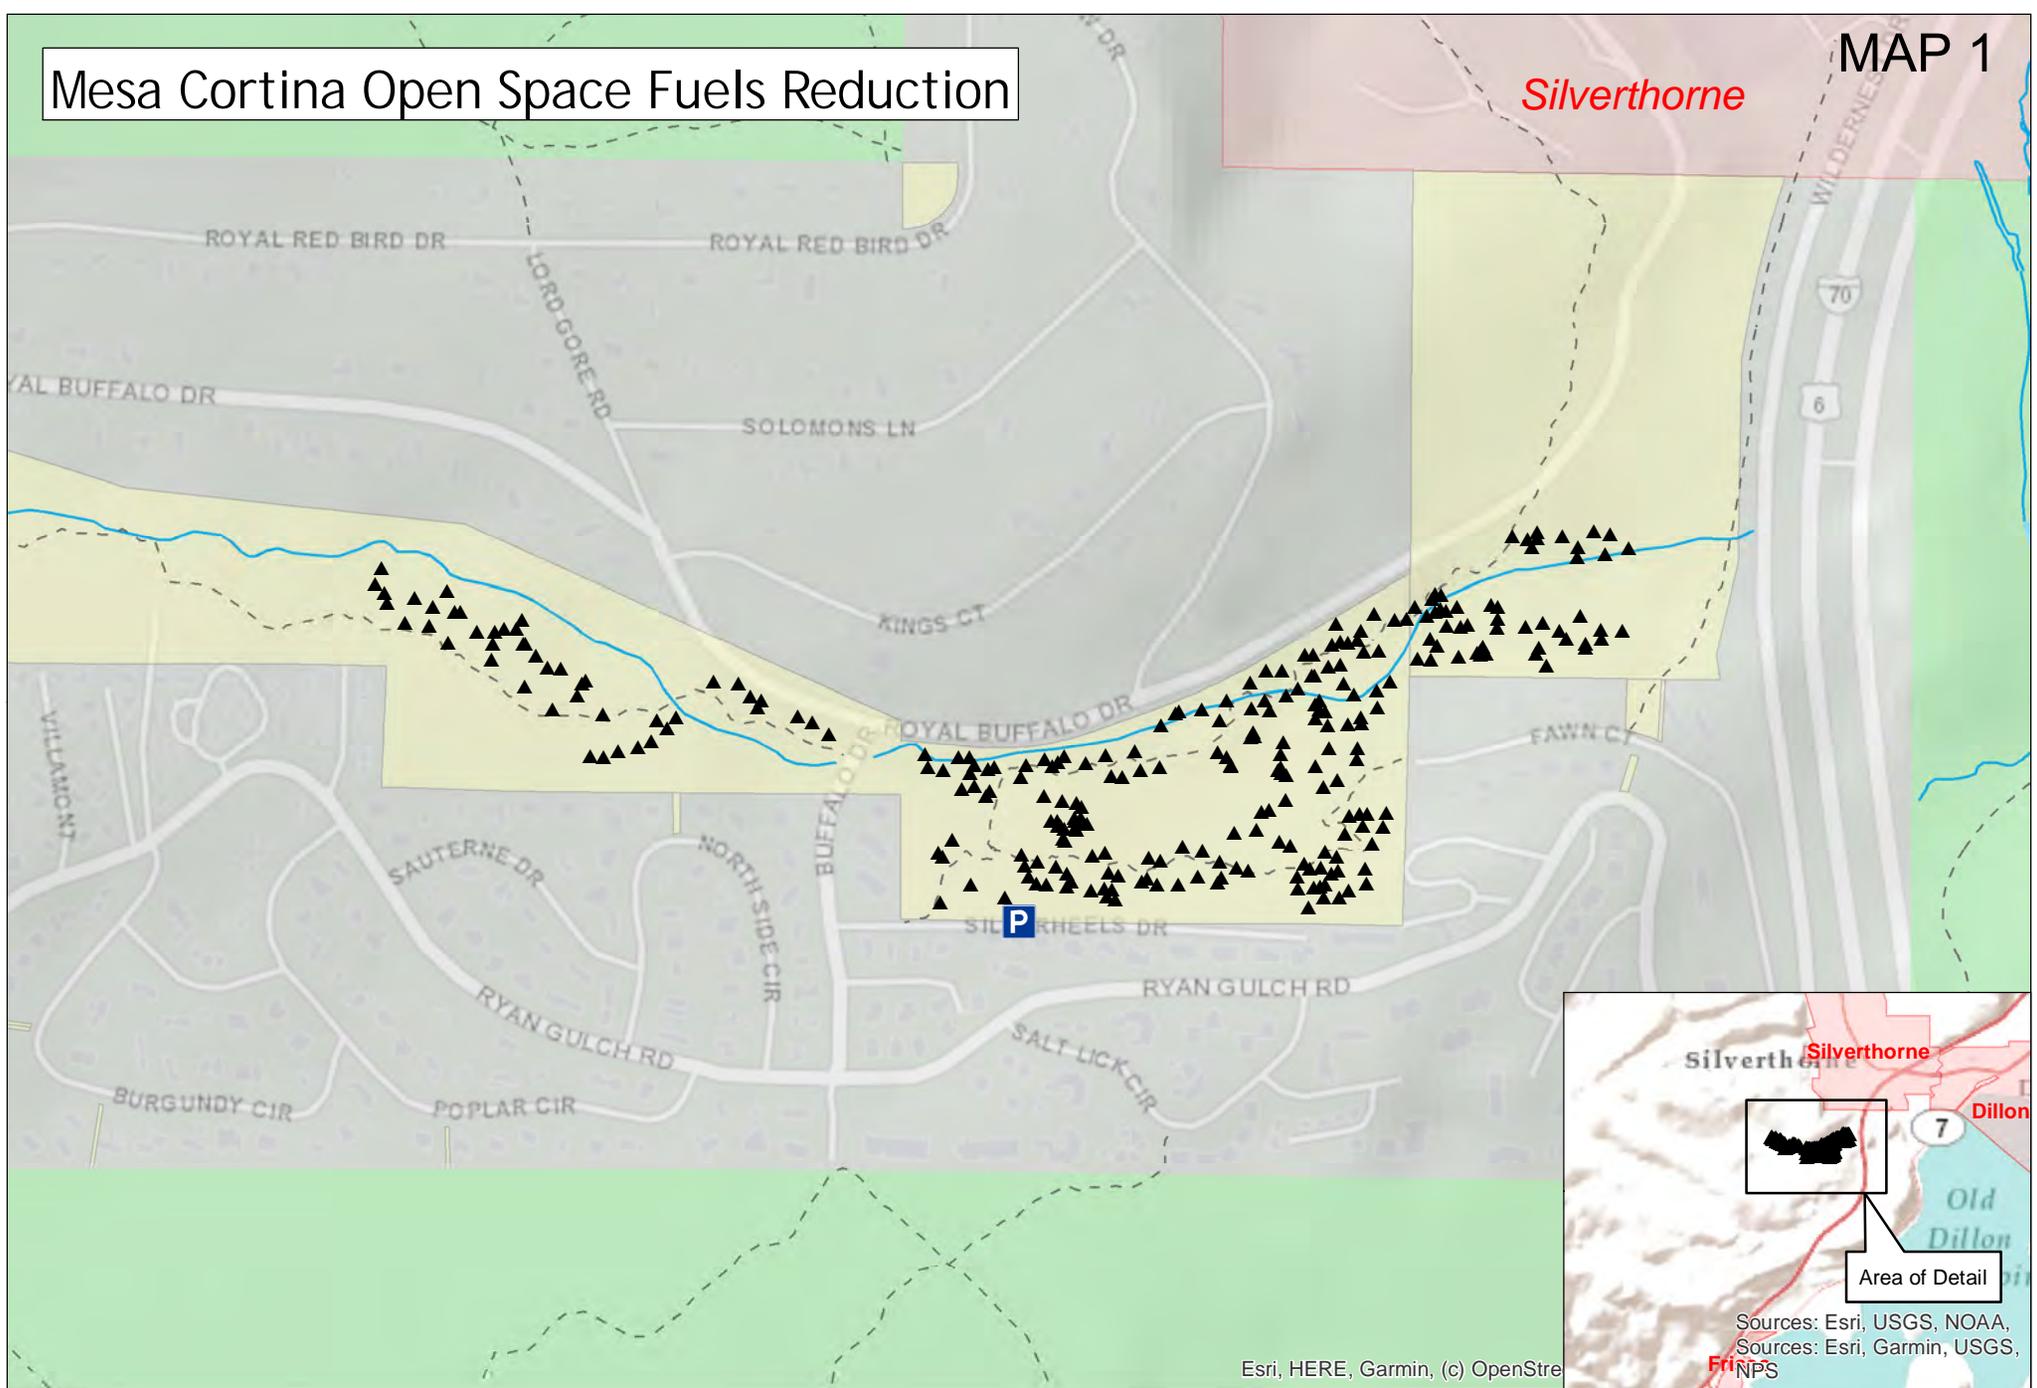

Esri, HERE, Garmin, (c) OpenStreetMap contributors, Imagery © Mapbox

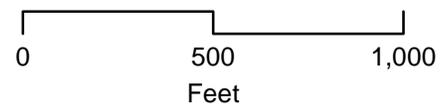

▲ Existing Slash Piles	WRNF lands	----- Trails
Open Space	Towns	

EXHIBIT A:
MESA CORTINA CUT TREE “KINDLING” SPECIFICATIONS

CONTRACTOR shall cut dead and live trees for fine fuels according to the following guidelines:

1. ALL cut trees must be completely severed from the stump
2. ALL cut tree material less than 10.0 inches in diameter (boles, limbs, tops) must be hand piled according to the specifications in the Mesa Cortina Scope of Work
3. Cutting Priority / Characteristics of Cut Trees:
 - a. Dead trees with sufficient fine fuels
 - b. Lodgepole pine saplings less than 5.0 DBH or less than 30 feet tall
 - i. Within the drip line of larger trees and could provide ‘fire ladders’
 - ii. Dwarf mistletoe present
 - iii. Shows insect or disease damage by foliage discoloration, pitch on stems, or deformities
 - iv. Yellow or reddish color, sparse foliage, tree crown has holes in it
 - v. Bent, crooked or forked
 - vi. Two or more leaders of approximately equal length
 - c. Spruce and fir saplings less than 5.0 DBH or less than 30 feet tall
 - i. Within the drip line of larger trees and could provide ‘fire ladders’
 - ii. Shows insect or disease damage by foliage discoloration, pitch on stems, or deformities
 - iii. Yellow or reddish color, sparse foliage, tree crown has holes in it
 - iv. Bent, crooked or forked
 - v. Two or more leaders of approximately equal length
 - d. Lodgepole pine trees greater than 5.0 DBH and 30 feet tall



OPEN SPACE & TRAILS DEPARTMENT

970.668.4060 ph | 970.668.4225 f
www.SummitCountyCO.gov

0037 Peak One Dr. | PO Box 5660
Frisco, CO 80443

ATTACHMENT 2. SITE VISIT DETAILS

for

Mesa Cortina Slash Pile Reconstruction

- AND -

Settler's Creek and Bacon Lode Hazardous Fuels Reduction Hand Treatment

May 22, 2023

County staff will host *mandatory* site visits for both the Mesa Cortina Slash Pile Reconstruction and the Settler's Creek and Bacon Lode Hazardous Fuels Reduction Hand Treatment on **Tuesday, May 30th, 2023**. Details for those site visits can be found below. Please reach out to Jordan Mead by [email](#) or call (970) 668-4065 with any questions related to site visit times and locations.

Mesa Cortina Slash Pile Reconstruction

When: Tuesday, May 30, 2023, 9AM MDT

Where: Silverheels Dr, Wilderrest Subdivision, Silverthorne, CO 80498

Location: The Mesa Cortina Open Space project is located southwest of the Town of Silverthorne and just west of Interstate 70 in Summit County, CO. The unit is bordered by Summit County Open Space to the west, Interstate 70 to the east, and residential developments to the north and south. Royal Buffalo Dr. (CR 1240) forms the unit boundary to the north and Fawn Ct. (CR 1261) and Silverheels Dr. (CR 1274) form a discontinuous unit boundary to the south (Map 1).

Access: From I-70 take Exit 205, Silverthorne/Dillon, and travel north on HWY 9 for 0.1 miles to the intersection with Wilderrest Rd. (CR 1255). Turn left on Wilderrest Rd. (CR 1255) and continue for 0.2 miles to the intersection with Royal Buffalo Dr. (CR 1240) and continue straight for 0.9 miles. Turn left onto Buffalo Dr. (CR 1265) and follow for 0.1 miles. Turn left on Silverheels Dr. (CR 1274) and utilize roadside parking adjacent to the unit (Map 1). [Click here for a Google Maps pin](#) of the meeting location.

Settler's Creek and Bacon Lode Hazardous Fuels Reduction Hand Treatment

When: Tuesday, May 30, 2023, 11AM MDT

Where: Independence Rd, Keystone, CO 80435

Location: The Settlers Creek unit is located southwest of Montezuma Rd. (CR 5), just east of Independence Rd. near Keystone Resort in Summit County, CO. The unit is bordered by Summit County Open Space to the south, east, and west, and Private Open Space to the north (Map 1).

We will begin the visit at the Settler's Creek unit and move to the Bacon Lode unit after completion of the visit at Settler's Creek. The Bacon Lode unit is located north of County Road 454 in Breckenridge, CO. The Chantilly trail bisects the unit. It is bordered by USFS property to the North and various private properties to the South. The Chantilly trail starts in the East side of the unit and exits through the South side of the unit (Map 2).

Access: From I-70 take Exit 205, Silverthorne/Dillon, and travel west on HWY 6 for 7.8 miles to the off ramp for

Montezuma Road (CR 5). Follow the ramp and continue on Montezuma Rd (CR 5) for 0.8 miles. Turn right onto Independence Rd (CR 257), directly across from the entrance to the Keystone Resort Power Line lot. Follow Independence Rd (CR 257) for 0.2 miles and utilize roadside parking adjacent to the chain gate along the Snake River. Access to the site will be on foot, following an access route along the Snake River (Map 1). [Click here for a Google Maps pin](#) of the meeting location.

We will begin the visit at the Settler's Creek unit and move to the Bacon Lode unit after completion of the visit at Settler's Creek. To access the Bacon Lode, from CO 9 on the north end of Breckenridge, travel SE on Huron Road (CR 450) for 0.4 miles. Turn left onto Forest Hills Dr and follow in a generally NE direction for 1.4 miles to the 3rd switchback, and pull into the gravel, roadside parking area (Map 2). [Click here for a Google Maps pin](#) of the meeting location.

MESA CORTINA SLASH PILE RECONSTRUCTION				
Attachment 3 - Bid Table				
VENDOR NAME:				
DATE:				
Item	Unit	Quantity	Unit Cost	Total
Slash pile reconstruction, consolidation, and addition of blow down	Lump Sum	1		
Grand Total				